

JCS94 U.S. Dept of
06/15/98

Mack Wright, et al

Title: PNEUMATICALLY ACTUATED PATIENT MONITOR HAVING MULTIPLE PULSE GENERATORS

Pittsburgh, Pennsylvania 15219
June 15, 1998

Assistant Commissioner for Patents
Box New Patent Application
Washington, DC 20231

FILING OF PAPERS AND FEES BY "EXPRESS MAIL" WITH CERTIFICATE

Sir:

Enclosed please find the captioned application for filing. Please assign the Express Mailing date as given in the below Express Mailing Certification as the filing date of this application pursuant to 37 C.F.R. 1.10.

The documents enclosed herein and are:

1. Specification (pages 1-10)
2. Claims (numbered 1-6 on pages 11-12)
3. Abstract of the Disclosure (on page 13)
4. Drawings (7 sheets)
5. Declaration and Power of Attorney for a Patent Application (unsigned, 3

pages)

Dated: June 15, 1998

Page 1 of 2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Mack Wright, et al

Filed concurrently herewith

Title: PNEUMATICALLY ACTUATED PATIENT MONITOR HAVING
MULTIPLE PULSE GENERATORS


--oOo--

Pittsburgh, Pennsylvania 15219

June 15, 1998

6. Filing fee of \$790.00

Respectfully submitted,



Gregory J. Burke

Attorney for Applicant

Registration No. 38,399

Agent for Applicant

GJBurke/lcl


Enclosures

(412) 765-1580

Date: June 15, 1998

Page 2 of 2

I hereby certify that this FILING OF PAPERS AND FEES BY "EXPRESS MAIL" WITH CERTIFICATE request and the documents referred to as attached therein are being deposited with the United States Postal Service on this date June 15, 1998 in an envelope as "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10, Mailing Label Number EM586579852 addressed to the Assistant Commissioner for Patents, Box New Patent Application, Washington, D.C. 20231


Gregory J. Burke

Date: June 15, 1998

JCS94 U.S. PTO
06/15/98

PNEUMATICALLY ACTUATED PATIENT MONITOR
HAVING MULTIPLE PULSE GENERATORS

CROSS REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of United States Patent Application Serial Number 08/839,300, Filed April 17, 1997.

BACKGROUND OF THE INVENTION

1. Field of the Invention: The present invention relates generally to a patient monitoring system and more particularly to such a system incorporating a pneumatically actuated switch which is connectable to a nurse call system and which is responsive to multiple pressure generators.

2. Description of the Prior Art: It is known in the art to use pneumatically actuated switches, rather than electrical switches, as part of nurse call systems. Such switches, disclosed for example in United States Patent No. 3,823,285 to Dwyer, are particularly beneficial where combustion concerns may be present, as in oxygen rich environments, because the construction of the switch limits the possibility of arcing which is a problem associated with electrical switching.

However, all known systems involve the use of one pressure generator for creating a pressure pulse associated with one pneumatic actuated switch which is connectable to the receptacle of a nurse call system. Not known in the art is a system incorporating a single pneumatic switch responsive to multiple pressure generators. Such capability is useful for example to provide for the combination of an armable pressure

generator attached to a patient which generates a pressure pulse when the patient moves beyond a certain range and a second force actuated pressure generator which generates a pressure pulse in response to pressure applied to the generator by the patient.

Accordingly, it is an object of the present invention to provide a patient monitoring system in which a pneumatically actuated switch is responsive to multiple generators.

It is a further object of the present invention to increase the functionality of a pneumatically actuated switch of a monitoring system for a patient by providing a system in which one switch is responsive to multiple pneumatic pulse generators thereby allowing for a generator associated with a perimeter monitor for the patient and another generator associated with a nurse call device for the patient.

It is yet another object of the present invention to increase the capability of a nurse call system for multiple patients by providing a system in which one pneumatically actuated switch is responsive to multiple pneumatic pulse generators thereby allowing for separate generators associated with nurse call devices for separate patients connected to a single receptacle of a nurse call system.

SUMMARY OF THE INVENTION

According to the present invention, there is provided a patient monitoring system. The system includes the combination of a plurality of pneumatic pressure generators for generating pneumatic pulses, each generator being actuable by a patient;

conduit including a central control line joined to branch lines in a fluid conducting relation with the plurality of pneumatic generators; and a pneumatic actuated switch acted upon by pneumatic pulses delivered by the central control line from any of said pneumatic generators.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more fully understood when the following description is read in light of the accompanying drawings in which:

Fig. 1 is a plan view of a patient bed incorporating a monitoring system according to the present invention;

Fig. 2 is a perspective view of the monitoring system of figure 1;

Fig. 3 is a sectional view of the armable pneumatic pressure generator of figure 1;

Fig. 4 is a sectional view of the pneumatic switch of figure 1;

Fig. 5 is a perspective view of an alternative switch to the switch of figure 1 having a multiple orientation housing assembly shown in an in-line hose/housing assembly option;

Fig. 6 is a perspective view of the alternative switch of figure 5 shown in a right angle hose/housing assembly option; and

Fig. 7 is a schematic illustration of an embodiment of the present invention having the combination of two squeeze bulb pressure generators.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figures 1 and 2 illustrate a multiple generator patient monitoring system 2 according to the present invention to signal alternatively upon movement of the patient beyond a certain range or in response to signaling by the patient. Referring to figure 1, there is shown a plan view of a patient situated on a patient bed 3 having a cross rail 4. The monitoring system 2 includes an armable pneumatic pressure generator 5 attached to cross rail 4 through mounting clamp 6 and triggered upon movement of the patient to generate a pressure pulse as will be described in greater detail. The system also includes a force actuated pneumatic pressure generator actuated by pressure applied by the patient to generate a pressure pulse, shown in the preferred embodiment as squeeze bulb 7 per se well known in the art as disclosed in United States Patent No. 5,155,309 to Dwyer. A pneumatic switch 8, shown in figure 1 connected to a wall receptacle of a nurse call system, is responsive to pneumatic pulses generated by either of pneumatic generator 5 and squeeze bulb 7 to signal a nurse or other care giver that the patient needs assistance.

Pneumatic tubing 9 carries air pulses to switch 8 from generators 5 and 7 via y-connector 10. As seen in figures 1 and 2, y-connector 10 interconnects branch lines 9A and 9B from generator 5 and squeeze bulb 7, respectively with central control line 9C from switch 8 such that an air pulse emanating from either of generator 5 and squeeze bulb 7 will be directed through

y-connector 10 to switch 8. A tether 16 of nylon or other suitable material connects the patient to generator 5 through garment clasp 18 located at one end and trigger clip 20 located at the opposite end. The length of tether 16 is most preferably approximately 5 feet.

Turning to figure 2, the perspective view shows in greater detail the construction of the monitor system 2. The pneumatic pressure generator 5 has an armable piston 25 extending from an opening in a housing 26, the internal construction of the generator to be discussed in greater detail below. The piston 25 is maintained in an armed position by the U-shaped trigger clip 20 which fits within a groove 27 in the piston 25. The clip 20 functions as a trigger for activation of the pneumatic pressure generator upon the removal of the clip from the groove 27 of piston 25. The mounting clamp 6 extends from the housing 26 of the pneumatic pressure generator and is constructed for mounting the generator to a variety of locations. The garment clasp 18, connecting the patient to generator 5 at the end of tether 16 opposite trigger 20, may be attached to clothing of the patient.

The monitor shown in figure 1 and 2 functions in the following manner. With the pneumatic pressure generator attached through the mounting clamp to a suitable location of the bed 3, such as a headboard or railing, the pneumatic switch 8 is connected through plug 28 to a conventional nurse call signal system, or other suitable alarming network. The monitor is then armed by extracting the piston 25 from housing 26 and placing the

trigger clip 20 in the piston groove 27 to keep the piston 25 in an extracted position with respect to the housing 26. Once the patient has been positioned in the bed 3, the tether 16 is connected to the patient through the garment clasp 18.

With the monitor now in the armed condition, were the patient to attempt to leave the bed, an activation barrier having a radius equal to the length of tether 16 in an extended condition would be reached. Further movement by the patient beyond the activation barrier will result in the removal of the trigger clip 20 from the armed piston 25 causing retraction of the piston within the housing 26 of the pneumatic pressure generator 5 and release of a pneumatic pulse to the switch 8 via tubing 9 and y-connector 10. The switch 8 is responsive to the pneumatic pulse to send a signal through the plug 28 to a nurse call system to indicate that the patient has moved beyond the activation barrier and may need assistance.

Alternatively, the patient may consciously desire assistance and can signal the care giver through the same switch connection to the nurse call system through squeeze bulb 7. Pressure applied by the patient to squeeze bulb 7 causes compression of a chamber portion of the bulb resulting in a pulse of air directed to the pneumatic switch 8 via tubing 9 and y-connector 10.

Turning to figure 3, there is shown a perspective sectional view of the pneumatic pressure generator 5 of figures 1 and 2. The housing 26 includes an upper housing 32 having an

internal opening through which piston 25 extends. The housing 26 also includes a lower housing 34 which is attached to the upper housing through overlapping sections 36 and 38 of the upper and lower housings, respectively. Methods of attachment of the upper and lower housings include an interference fit between the overlapping sections, or by pinned or bolted locations around the circumference of the overlapping portions, or by a combination of both.

As seen in figure 3, the lower housing 34 has an internal opening into which the piston extends to a connection with a plunger 40. A spring 42 located within the opening in the lower housing 34 acts between the plunger 40 at one end and the upper housing 32 at an opposite end to provide a force tending to return the piston within the housing after the piston has been extracted for arming. When the trigger clip 20 of figure 1 and 2 is removed from the groove 27, the spring 42 forces the piston 25 and the attached plunger 40 back into the internal opening in the lower housing 34. This creates a pressure pulse between an edge surface 44 of plunger 40 and an end face 46 of the lower housing 34 which exits the pressure generator through nozzle 48 to the pneumatic tubing 9 of figures 1 and 2 which is connected to the nozzle.

The plunger 40 must be free to slide within the opening in the lower housing 34 but must be sufficiently close fitting so that an air pulse can be generated in front of the plunger face 46. The tolerance must be sufficient for generation of a pulse

of air in front of plunger 40 but need not be unnecessarily close as the pneumatic switch 8 is responsive to low level pressure pulses. The responsiveness of switch 8 to weak pulses is also useful in the present invention to allow for the connection of multiple pressure generators through y-connector 10 without requiring special valving associated with y-connector 9 to prevent pressure losses in inactive sections. For example, when generator 5 is triggered sending a pulse of air to switch 8 via y-connector 10, the pulse pathway associated with the inactive squeeze bulb 7 will remain open.

Turning to Figure 4, the pneumatic switch 8 of figures 1 and 2 is seen in greater detail. The switch 8 may be constructed in the manner disclosed in United States Patent No. 3,823,285 to Dwyer and such disclosure is incorporated herein by this reference thereto. The switch includes an electrically conductive ball 50 contained within a closely toleranced bore 52 of an electrically conductive sleeve 54. The electrically conductive sleeve 54 is in electrical contact with an external first conductor portion 56 of plug 28. An internal second conductive portion 58 of plug 28, electrically insulated from the first portion, extends through an opening 60 in the conductive sleeve allowing for contact between the ball 50 and the second conductive portion 58 as the ball is driven upwards in the sleeve in response to a pulse of air delivered from the generator 12 via the hose 22. This contact closes an electrical circuit normally open sending a signal through the plug to the nurse call system

to which the plug is connected. The porous filter 62 provides for venting of air on the downstream side of the conductive ball 50 allowing the pressure pulse on the upstream side of the ball from the filter to drive the ball upwards into contact with the second conductive portion 58.

Referring to figures 5 and 6, there is illustrated a pneumatic switch 70 in a further embodiment of the present invention. The switch 70 which utilizes a conductive plunger may be constructed in the manner disclosed in United States Patent No. 5,736,702 to Roberts and such disclosure is incorporated herein by this reference thereto. The construction of switch 70 allows for multiple angular positions of the switch with respect to the tubing of the system to which it is attached, as seen in the figures in which figure 5 illustrates an in-line connection and figure 6 illustrates a right angle connection. As was the case with switch 8 of figures 1 and 2, the construction of switch 70 provides for responsiveness of the switch to low pressure pulses of air which is useful in the multiple generator system according to the present invention. Switch 70 includes a housing 72 and a connector 74 which have interfitting surfaces allowing for provision of a pathway for an air pulse through the connector 74 and into the housing 72 in varying orientations of the connector with respect to the housing. The switch includes a plug 76 for connection to the receptacle of the nurse call system seen in figure 1.

It is important to note that the present invention is

not limited to the combination of figure 1 and 2 having the armable generator 5 and the squeeze bulb 7. The invention is also applicable to other numbers of generators as well as to differing combinations of generators. For example, in figure 7 there is illustrated schematically a combination involving two force-actuated squeeze bulbs 7 according to the present invention connected through a single pneumatic switch to the receptacle of a nurse call system.

Although figure 1 shows an embodiment of the present invention used in conjunction with a patient located on a bed, it should be noted that the system of the present invention would be equally suited for use in connection with a patient located on other items of furniture such as a chair, for example. When a chair is used to support the patient, the generator will be attached by the clamp mounting portion to a chair rail.

While the present invention has been described in connection with the preferred embodiment of the various figures, it is to be understood that other similar embodiments may be used or modifications and additions may be made to the described embodiment for performing the same function of the present invention without deviating therefrom. Therefore, the present invention should not be limited to any single embodiment, but rather construed in breadth and scope in accordance with the recitation of the appended claims.

CLAIMS

I claim:

1. A patient monitoring system including the combination of:

a plurality of pneumatic pressure generators for generating pneumatic pulses, each generator being actuatable by a patient;

conduit including a central control line joined to branch lines in a fluid conducting relation with said plurality of pneumatic generators; and

a pneumatic actuated switch acted upon by pneumatic pulses delivered by said central control line from any of said pneumatic generators.

2. The system according to claim 1 wherein said conduit further includes a branched connector for operably connecting said branch lines to said central control line.

3. The system according to claim 1 wherein said pneumatic pressure generators includes an armable generator including a clamp for stationary mounting proximate to a patient bearing area, said armable generator further including a releasable trigger operably connected by a tether to a patient for actuation of said trigger when the travel of the patient exceeds the length of the tether.

4. The system according to claim 1 wherein said pneumatic pressure generators includes a force-actuated pressure generator having a compressible portion for generating said

25 pneumatic pulse in response to pressure applied by the patient to
said compressible portion.

5. The system according to claim 1 wherein said
pneumatically actuated switch includes an electrically conductive
sleeve having an internal bore in which an electrically
30 conductive ball is slidably contained, said ball being slidable
in response to a pneumatic pulse from one of said plurality of
pneumatic generators for creating a momentary electrical
connection.

35 6. The system according to claim 1 wherein said
pneumatically actuated switch includes a housing which is capable
of providing an air passageway for said pneumatic pulses in a
plurality of angular orientations of said switch with respect to
said connection of said switch to said pressure generators.

ABSTRACT OF THE DISCLOSURE

A patient monitoring system incorporating a pneumatic switch which is responsive to a pair of pressure generators, including a first armable pressure generator which is attached to the patient and which is triggered upon movement of the patient beyond a certain range and a second force actuated generator having a portion to which a patient applies pressure.

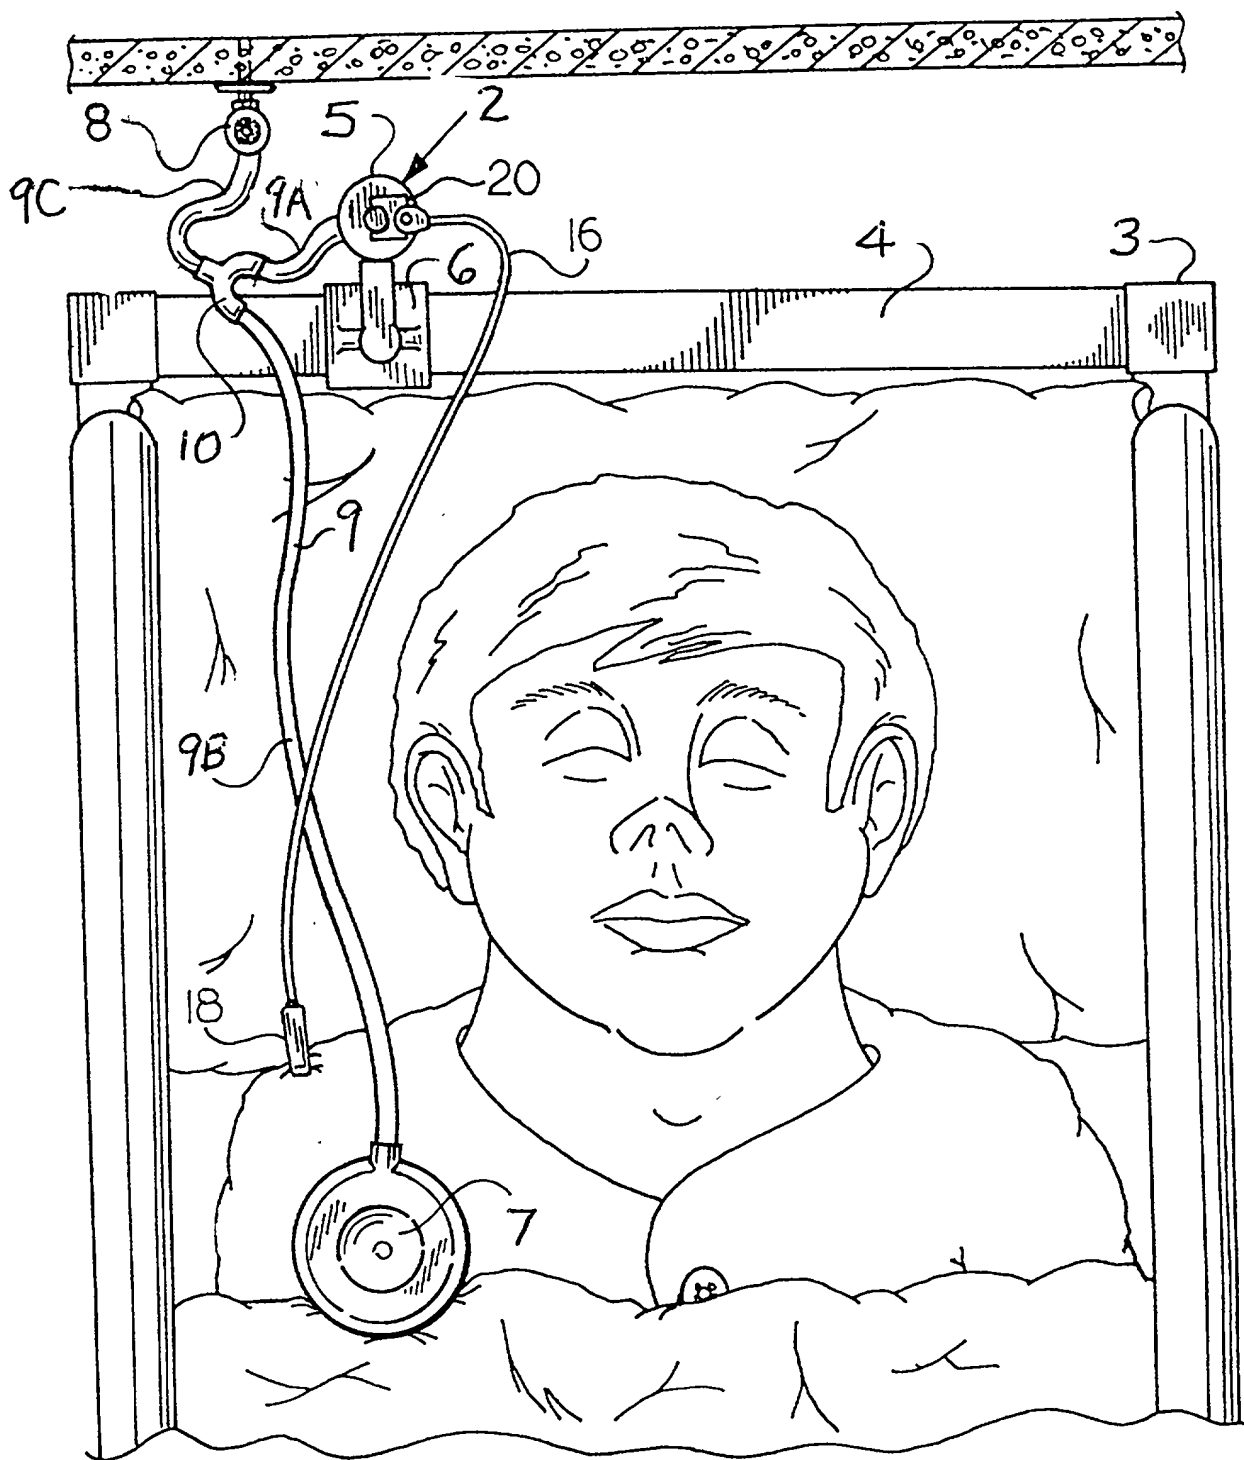


FIG.1

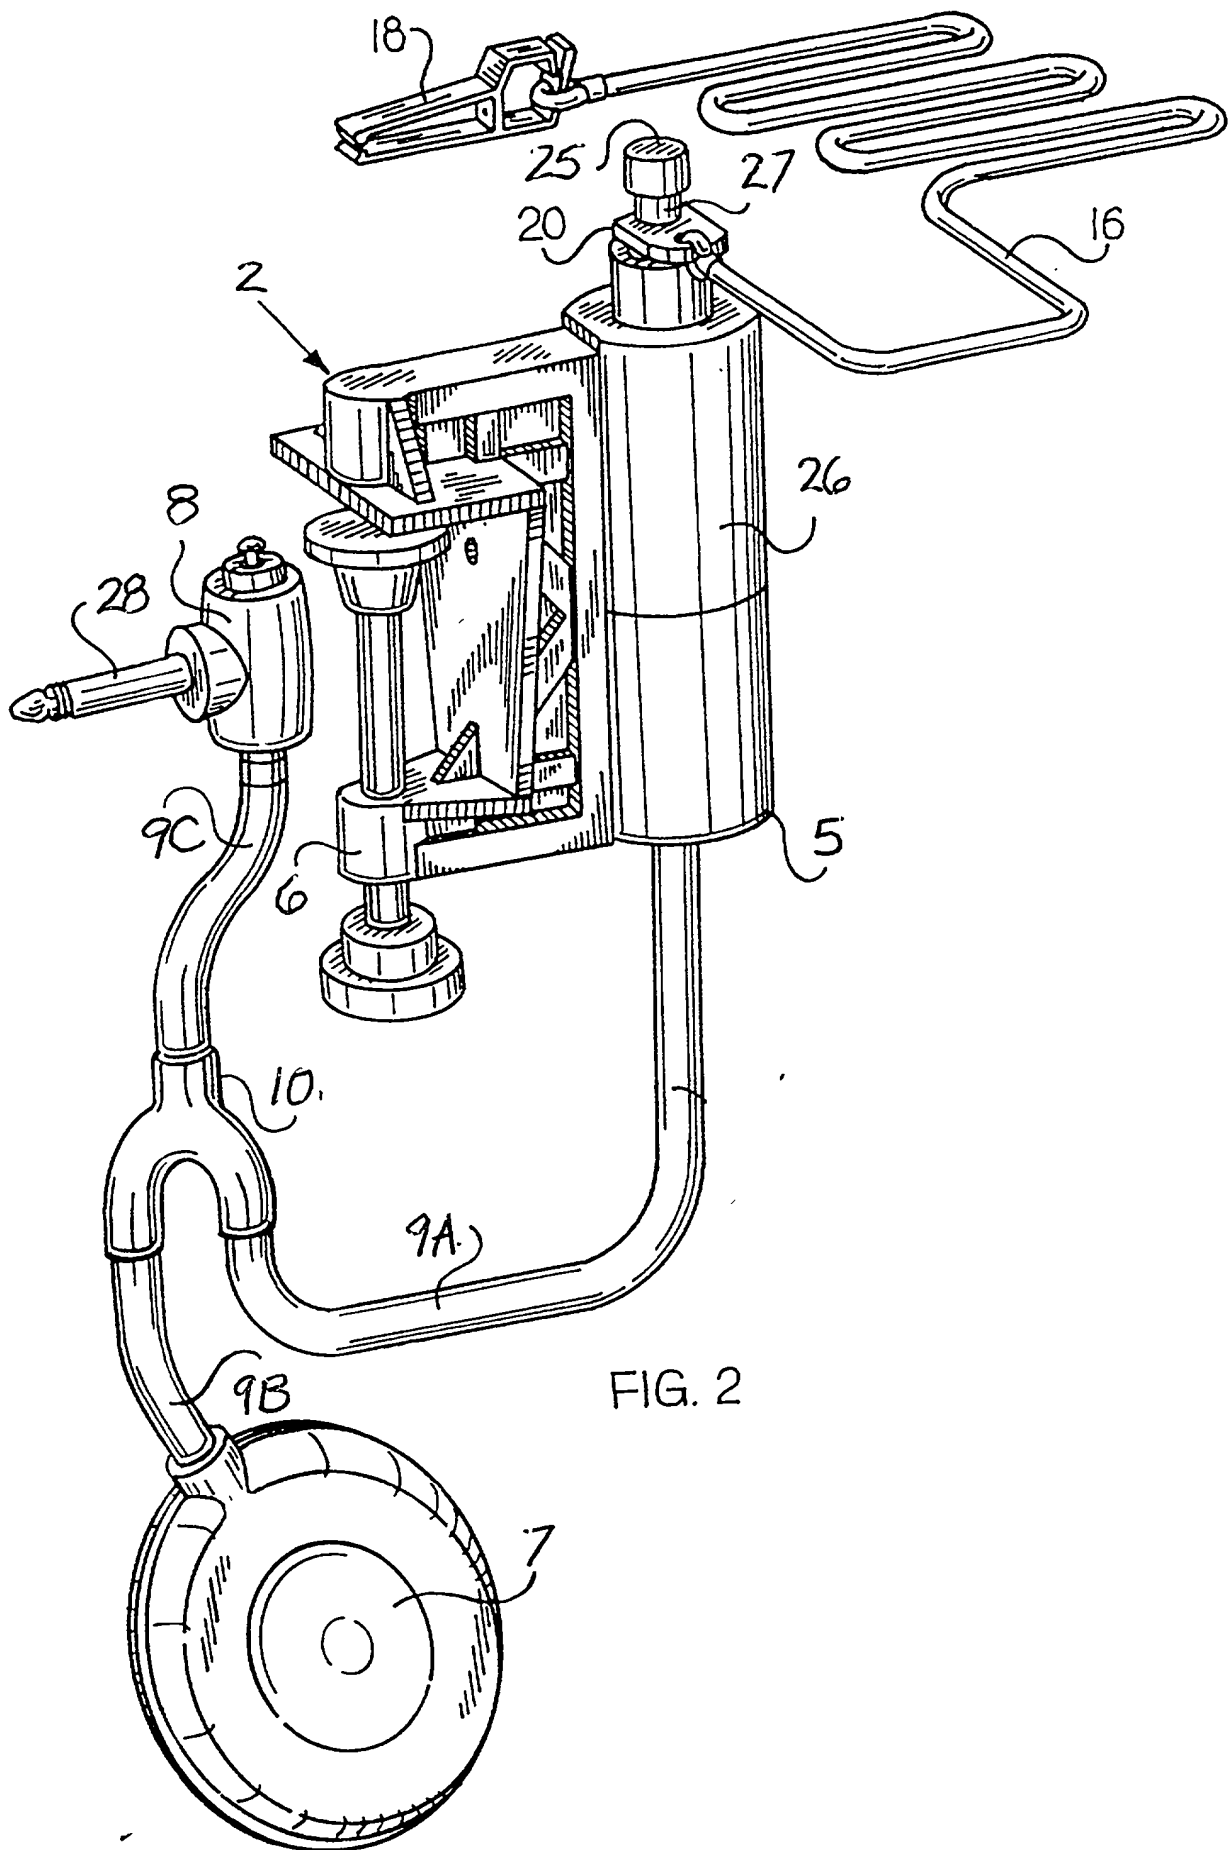


FIG. 2

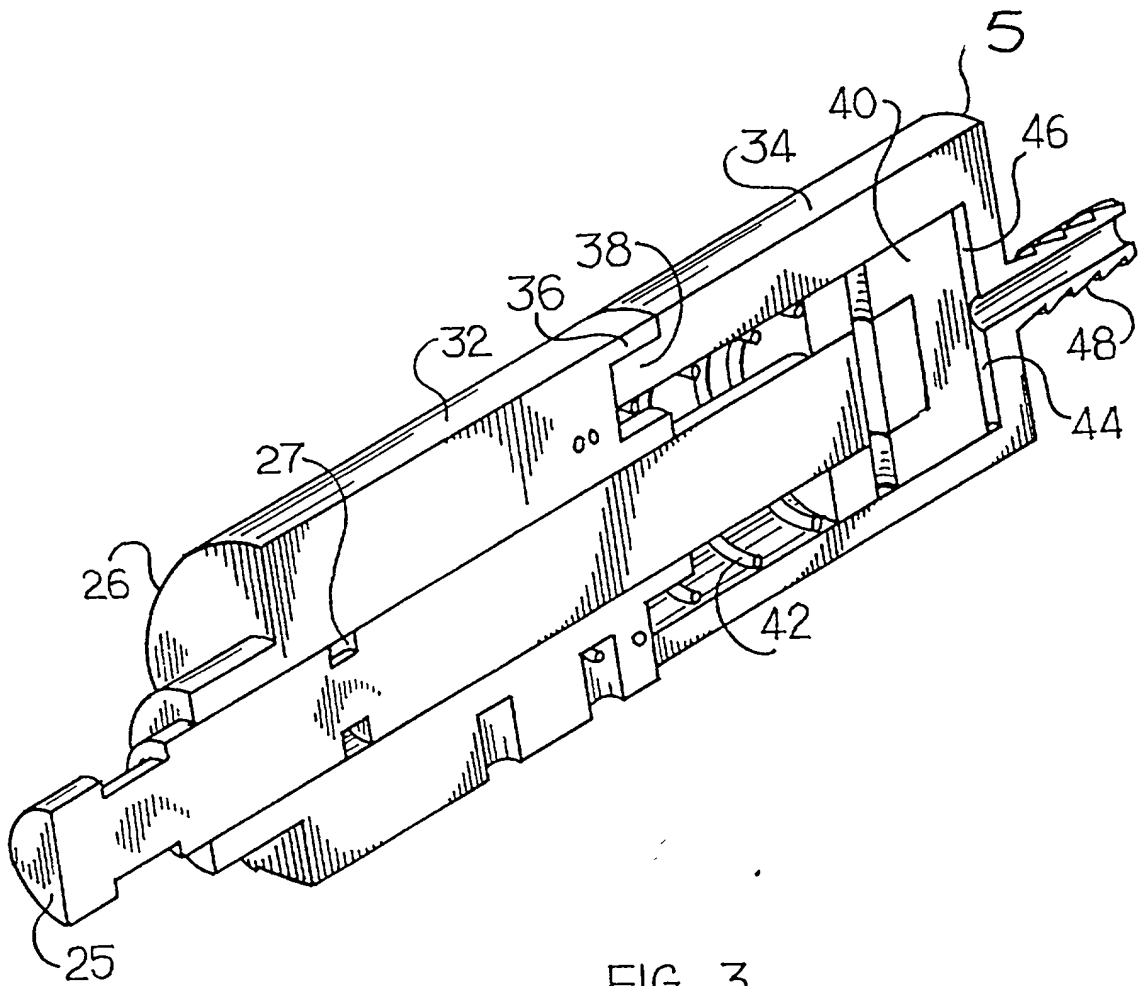


FIG. 3

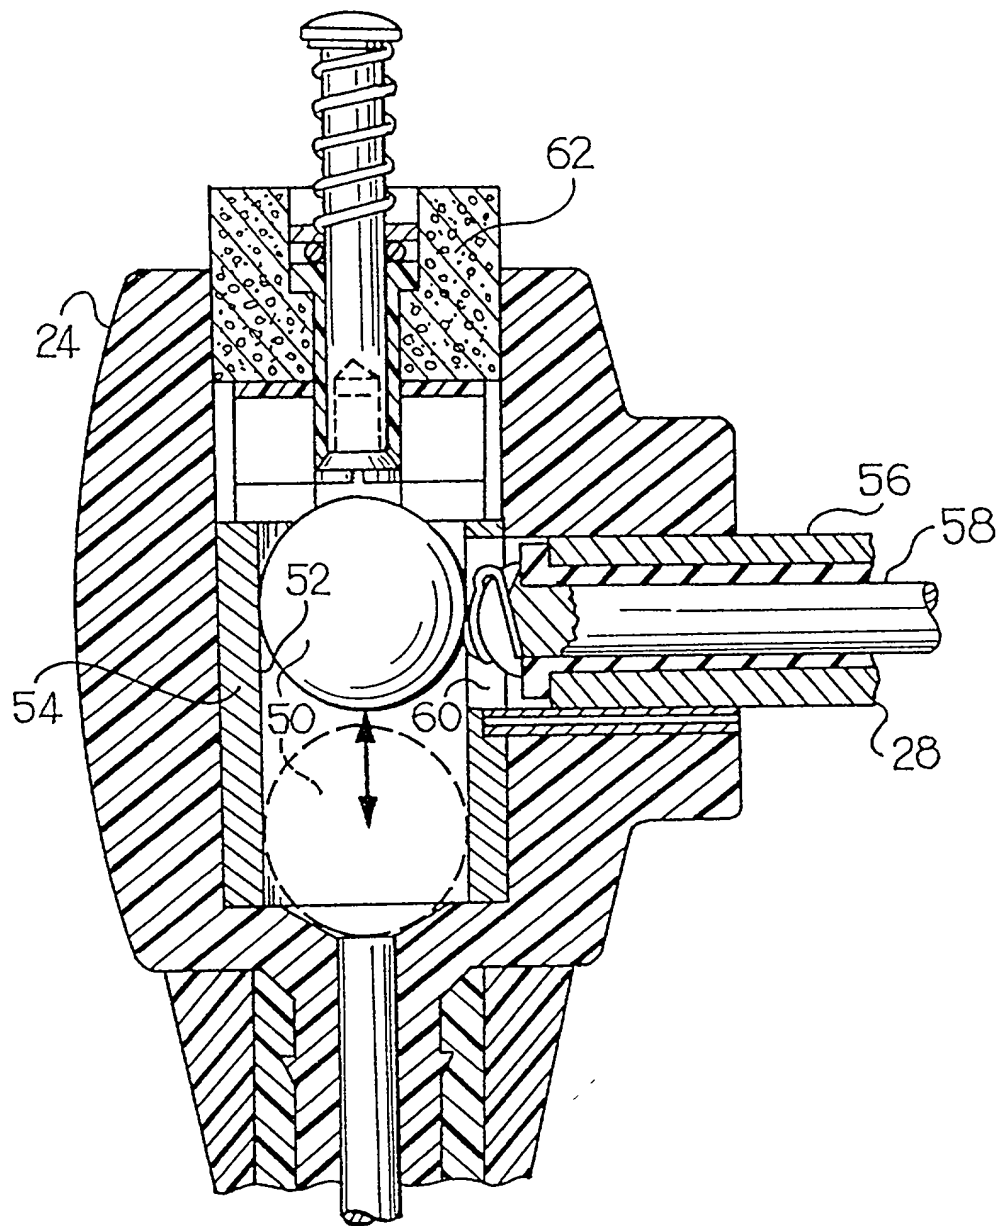


FIG. 4

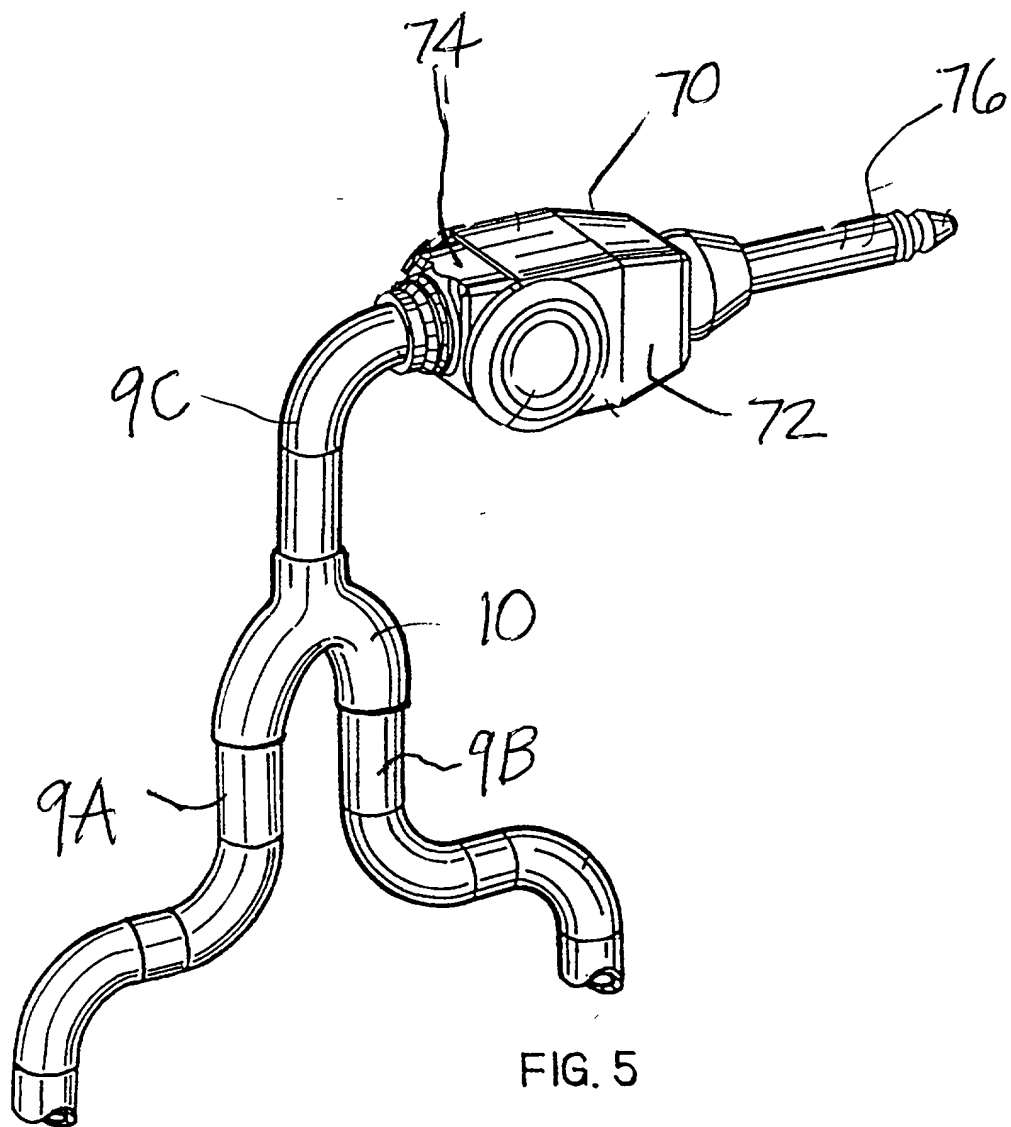


FIG. 6

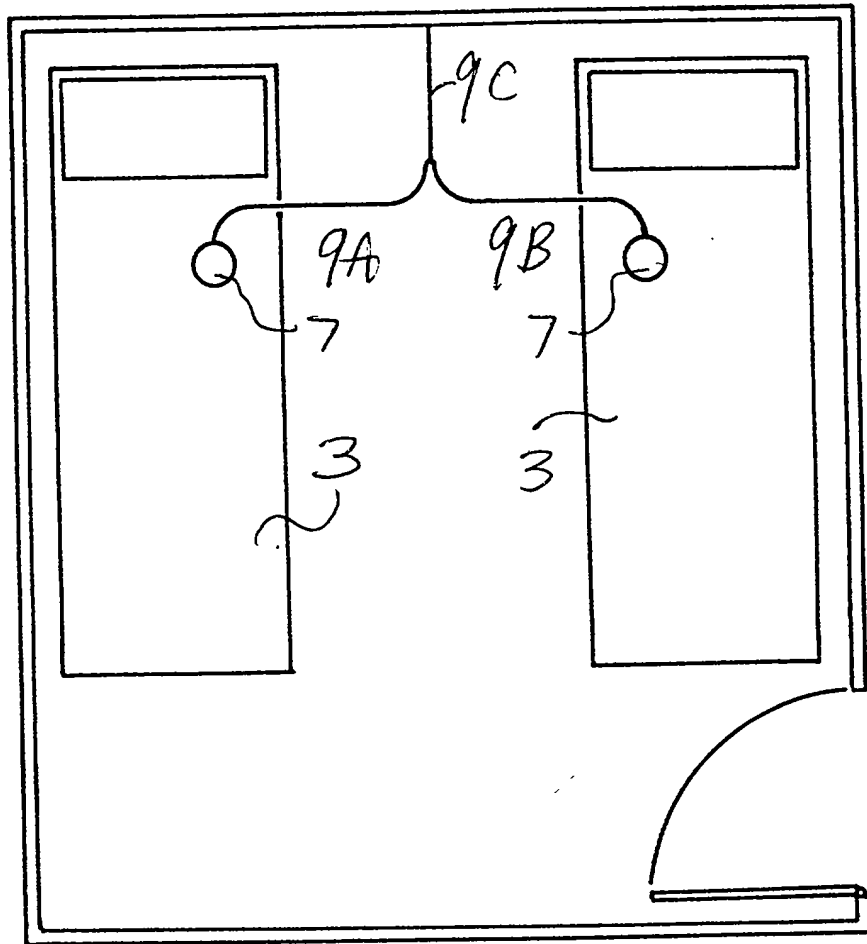


FIG. 7

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

Attorney Docket Number	20308-36
First Named Inventor	Mack Wright
COMPLETE IF KNOWN	
Application Number	
Filing Date	
Group Art Unit	
Examiner Name	

☒ Declaration Submitted with Initial Filing OR ☐ Declaration Submitted after Initial Filing

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled :

PNEUMATICALLY ACTUATED PATIENT MONITOR HAVING MULTIPLE PULSE GENERATORS

(Title of the Invention)

the specification of which

☒ is attached hereto OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.58 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT International application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code Label here

Name	Registration Number	Name	Registration Number
CLIFFORD A. POFF	24,764		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number or Bar Code Label ☐ OR ☒ Correspondence address below

Name	CLIFFORD A. POFF					
Address	SUITE 2230 KOPPERS BUILDING					
Address	436 SEVENTH AVENUE					
City	PITTSBURGH	State	PA	ZIP	15219	
Country	U.S.A.	Telephone	412-765-1580		Fax	412-765-1583

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])	Family Name or Surname
MACK	WRIGHT

Inventor's Signature					Date		
Residence: City	JACKSONVILLE	State	FL	Country	USA	Citizenship	USA
Post Office Address	14019 BEACH BLVD.						
Post Office Address	LOT #48						
City	JACKSONVILLE	State	FL	ZIP	32250	Country	USA

☒ Additional inventors are being named on the _____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle (if any))				Family Name or Surname			
BERT				WECHTENHEISER			
Inventor's Signature					Date		
Residence: City		PONTE VERDA BEACH		State	FL	Country	USA
Post Office Address		101 DOLPHIN BLVD. E.					
Post Office Address							
City		PONTE VERDA BEACH		State	FL	ZIP	32082
						Country	USA

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature					Date		
Residence: City				State		Country	
Post Office Address							
Post Office Address							
City				State		ZIP	
						Country	

☐ Additional inventors are being named on the ____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

		<input type="checkbox"/> A petition has been filed for this unsigned inventor					
Given Name (first and middle (if any))				Family Name or Surname			
Inventor's Signature					Date		
Residence: City				State		Country	
Post Office Address							
Post Office Address							
City				State		ZIP	
						Country	